


Mini-Porter-Cyclone

MP-50S CF12 Specifications

2026年08月31日

Item	Contents
① Lid stopper	Stainless steel (SUS304)
② Packing	Silicone
③ Lid stopper support	Stainless steel (SUS304)
④ Cyclone body	Stainless steel (SUS304)(connection: $\phi 50$ /plate thickness: 1.2mm)
⑤ Hose	Transparent PVC (ID $\phi 50 \times 3000$ mm)
⑥ MP lid	Aluminum alloy casting (AC4B) with melamine resin baking finish
⑦ Draw latch	Iron (Chrome plating) Rivet (Aluminum)
⑧ Suction pipe	Aluminum (OD $\phi 50 \times 600$ mm)
⑨ Tank	30L Stainless steel (SUS304)
⑩ Stand	Aluminum alloy casting (AC4C) with melamine resin baking finish
⑪ Casters	Conductive casters: 4 pcs (including 1 braked caster)

Remarks

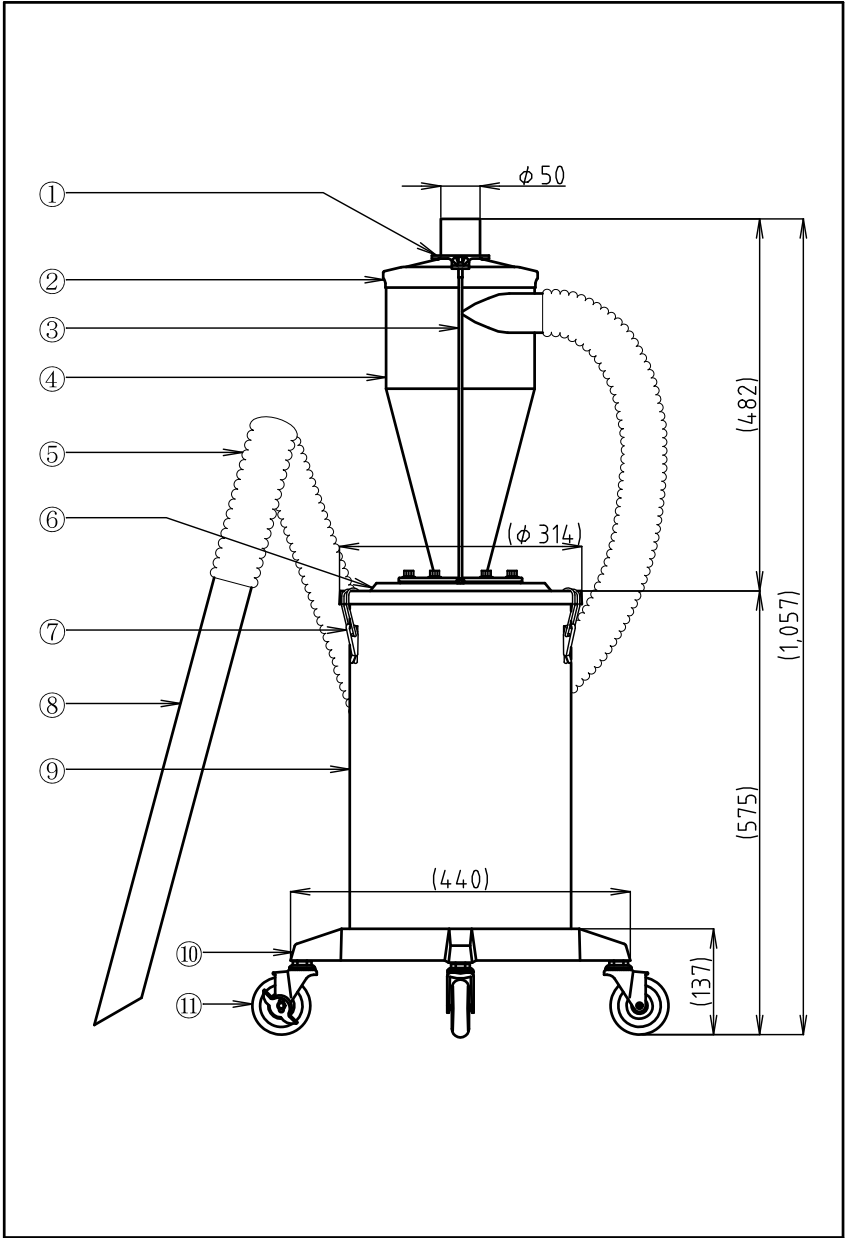

OSAWA & COMPANY

1-7-28 YUNAGI MINATO-KU OSAKA 552-0004 JAPAN
E-mail: osawa@osawa-company.co.jp
URL: <https://www.osawa-company.co.jp>