


Silent-Cleaner

SC30-38S Specifications

2026/07/29

項 Item 目	Content 容
① Silencer	Outer: Stainless steel (SUS304) / Inner: White cloth (PP), Glass wool
② Hose connection	3/8" ball valve with 30PM air coupler
③ Silent-Cleaner body	Aluminum alloy casting (AC4B) with melamine resin baking finish
④ Hose	Transparent PVC (ID ϕ 38×2000mm)
⑤ Draw latch	Iron (Chrome plating) Rivet (Aluminum)
⑥ Suction pipe	PVC (OD ϕ 38×600mm)
⑦ Tank	30L Stainless steel (SUS304)
⑧ Stand	Aluminum alloy casting (AC4C) with melamine resin baking finish
⑨ Casters	Conductive casters: 4 pcs (including 1 braked caster)
O-ring	NBR
Air pressure	0.5 to 0.6 MPa (5 to 6 kg/cm ²)
Suction pressure	-0.0305 to -0.0335 MPa (3,110 to 3,416 mmAq)
Exhaust sound	58 dB [at 0.5 MPa (5 kg/cm ²)]
Air consumption	375 to 438 L/min Normal

Remarks

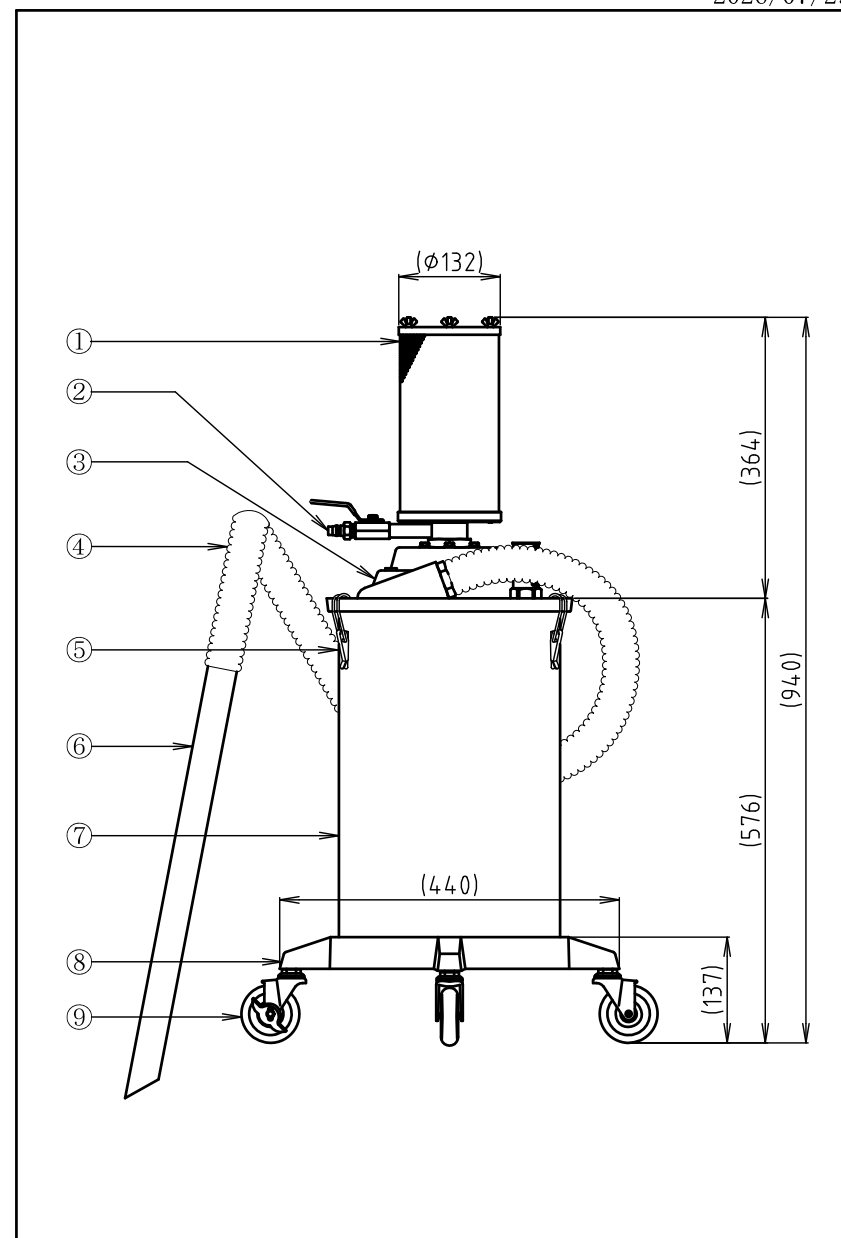

OSAWA & COMPANY

1-7-28 YUNAGI MINATO-KU OSAKA 552-0004 JAPAN
 E-mail: osawa@osawa-company.co.jp
 URL: <https://www.osawa-company.co.jp>