

Silent-Cleaner


SC60-32S W/F Specifications

2026/07/29

Item	Contents
① Silencer	Outer: Stainless steel (SUS304) / Inner: White cloth (PP), Glass wool
② Hose connection	3/8" ball valve with 30PM air coupler
③ Silent-Cleaner body	Aluminum alloy casting (AC4B) with melamine resin baking finish
④ Hose	Transparent PVC (ID $\phi 32 \times 2000\text{mm}$)
⑤ Draw latch	Iron (Chrome plating) Rivet (Aluminum)
⑥ Suction pipe	PVC (OD $\phi 32 \times 700\text{mm}$)
⑦ Tank	60L Stainless steel (SUS304)
⑧ Stand	Iron (Chrome plating)
⑨ Casters	2 rubber casters / 1 conductive caster with brake
O-ring	NBR
Air pressure	0.5 to 0.6 MPa (5 to 6 kg/cm ²)
Suction pressure	-0.0310 to -0.0350 MPa (3,161 to 3,569 mmAq)
Exhaust sound	60 dB [at 0.5 MPa (5 kg/cm ²)]
Air consumption	721 to 840 L/min Normal

W/F model	Filter	Glass wool
	Cover	Cloth

Remarks

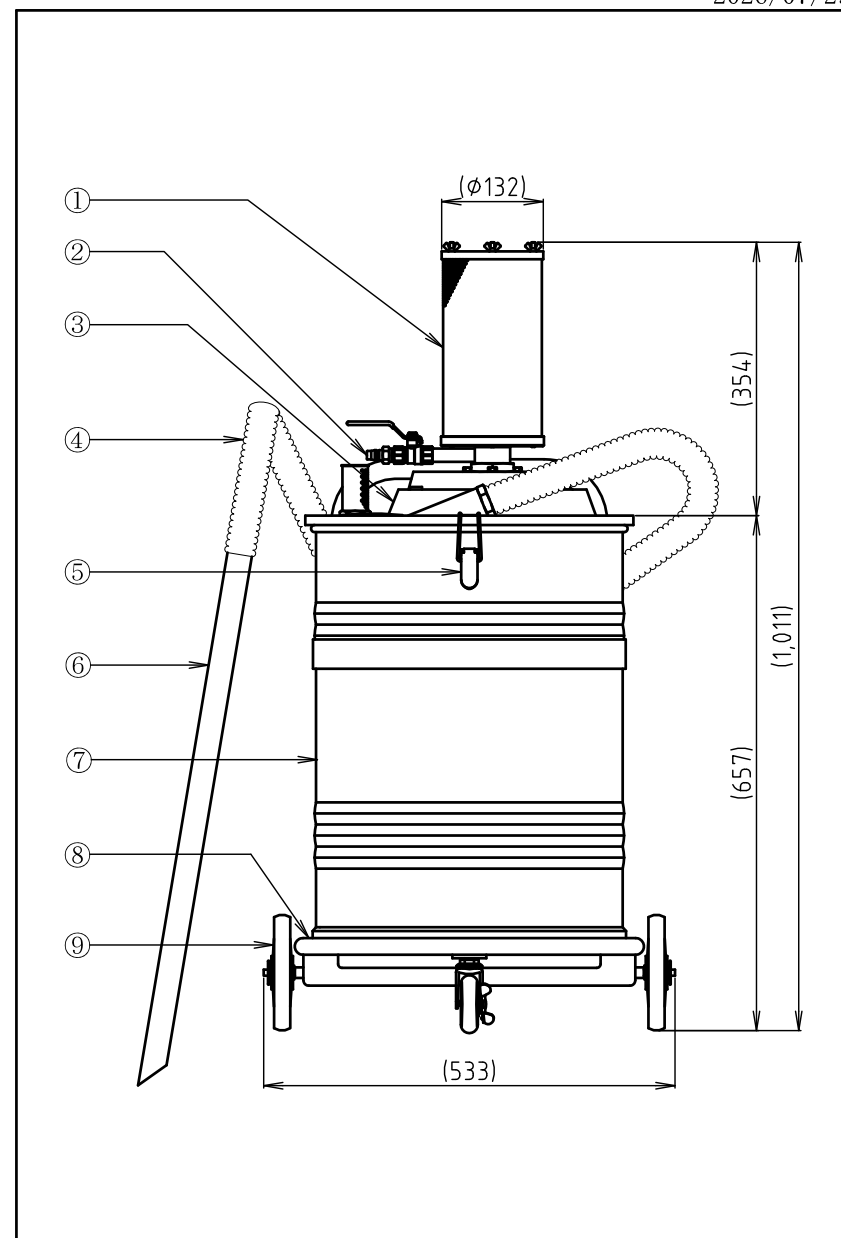

OSAWA & COMPANY

1-7-28 YUNAGI MINATO-KU OSAKA 552-0004 JAPAN
E-mail: osawa@osawa-company.co.jp
URL: <https://www.osawa-company.co.jp>