

Silent-cleaner

SC3T-19VG Specifications


2026/07/30

Items	Contents
① Silencer	Outer: Stainless steel (SUS304) / Inner: White cloth (PP), Glass wool
② Hose connection	1/4" ball valve with 20PM air coupler
③ Cleaner Lid	Stainless steel (SUS304)
④ Hose	PVC (ID ϕ 19×1500mm)
⑤ Draw latch	Iron (Chrome plating) Rivet (Aluminum)
⑥ Suction pipe	Stainless steel (SUS304) (OD ϕ 19×130mm)
⑦ Tank	3L Transparent PVC
O-ring	NBR

Performance		
Air pressure	Suction pressure	Air consumption
0.4 Mpa (4 kg/cm ²)	-0.0372 MPa (3,793 mmAq)	470 L/min Normal
0.5 Mpa (5 kg/cm ²)	-0.0517 MPa (5,272 mmAq)	564 L/min Normal
0.6 Mpa (6 kg/cm ²)	-0.0604 MPa (6,159 mmAq)	658 L/min Normal

Remarks

- This model is used specially for adhesive materials like grease.

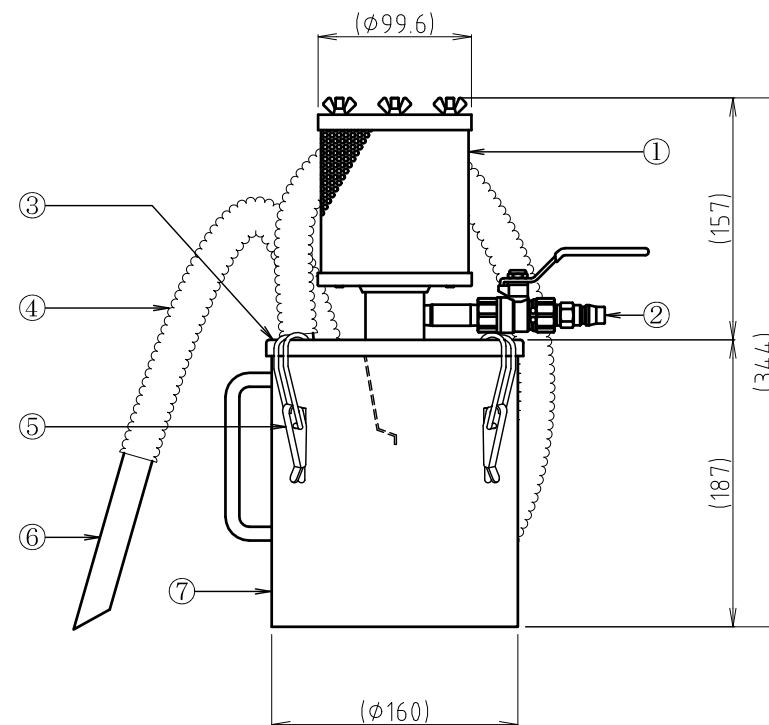

OSAWA & COMPANY

1-7-28 YUNAGI MINATO-KU OSAKA 552-0004 JAPAN
E-mail: osawa@osawa-company.co.jp
URL: <https://www.osawa-company.co.jp>