

サイレントクリーナー


SC20-32G W/F Specifications

2026/07/29

Item	Contents
① Silencer	Outer: Stainless steel (SUS304) / Inner: White cloth (PP), Glass wool
② Hose connection	3/8" ball valve with 30PM air coupler
③ Cleaner body	Aluminum alloy casting (AC4B) with melamine resin baking finish
④ Hose	Transparent PVC (ID $\phi 32 \times 2000\text{mm}$)
⑤ Draw latch	Iron (Chrome plating) Rivet (Aluminum)
⑥ Suction pipe	PVC (OD $\phi 32 \times 400\text{mm}$)
⑦ Tank	20L Steel pail with baking finish
⑧ Stand	Aluminum alloy casting (AC4C) with melamine resin baking finish
⑨ Casters	Conductive casters: 4 pcs (including 1 braked caster)
O-ring	NBR
Air pressure	0.5 to 0.6 MPa (5 to 6 kg/cm ²)
Suction pressure	-0.0364 to -0.0405 MPa (3,712 to 4,130 mmAq)
Exhaust sound	60 dB [at 0.5 MPa (5 kg/cm ²)]
Air consumption	500 to 584 L/min Normal

W/F model	Filter	Glass wool
	Cover	Cloth

Remarks

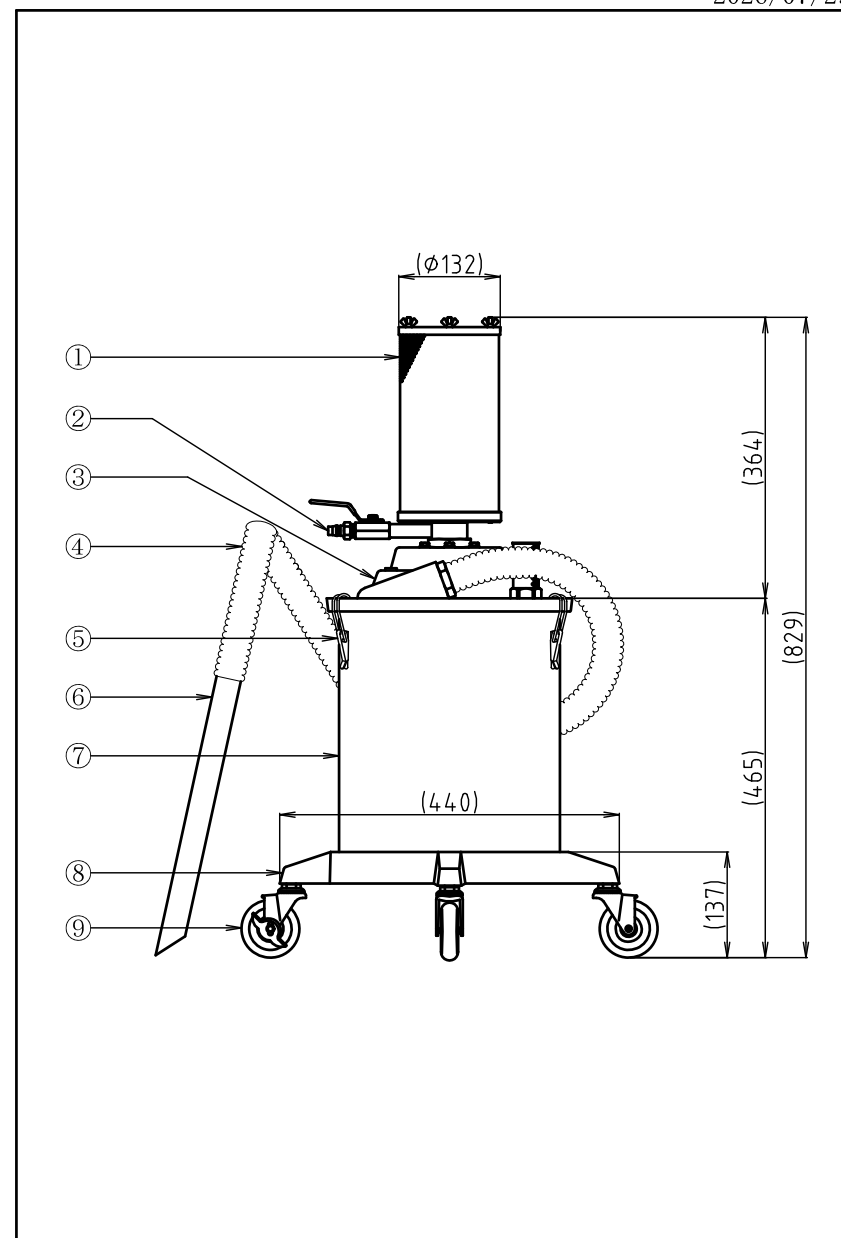

OSAWA & COMPANY

1-7-28 YUNAGI MINATO-KU OSAKA 552-0004 JAPAN
E-mail: osawa@osawa-company.co.jp
URL: <https://www.osawa-company.co.jp>