

Silent-Cleaner


SC200-50DG W/F Specifications

2026/07/29

Item	Contents
① Silencer	Outer: Stainless steel (SUS304) / Inner: White cloth (PP), Glass wool
② Hose connection	3/4" ball valve with 3/4" hose joint
③ Silent-Cleaner body	Aluminum alloy casting (AC4B) with melamine resin baking finish
④ Hose	Transparent PVC (ID $\phi 50 \times 2000\text{mm}$)
⑤ Cleaner lid	Iron
⑥ Suction pipe	PVC (OD $\phi 50 \times 700\text{mm}$)
O-ring	NBR
Air pressure	0.5 to 0.6 MPa (5 to 6 kg/cm ²)
Suction pressure	-0.0386 to -0.0451 MPa (3,936 to 4,599 mmAq)
Air consumption	1,779 to 2,075 L/min Normal

W/F model	Filter	Glass wool
	Cover	Cloth

Remarks

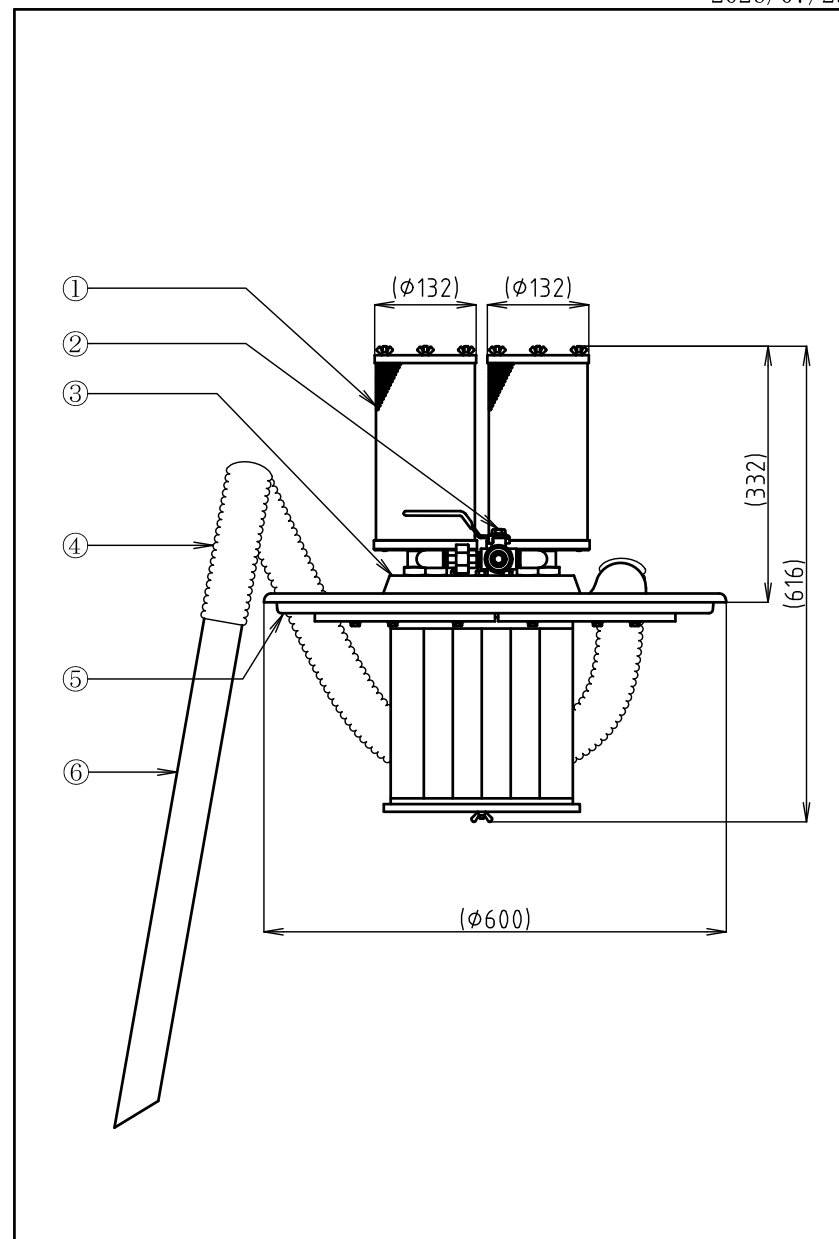

OSAWA & COMPANY

1-7-28 YUNAGI MINATO-KU OSAKA 552-0004 JAPAN

E-mail: osawa@osawa-company.co.jp

URL: <https://www.osawa-company.co.jp>