

Silent-Cleaner


SC30-32SVG Specifications

2026/07/30

Item	Contents
① Silencer	Outer: Stainless steel (SUS304) / Inner: White cloth (PP), Glass wool
② Pressure gauge	An air pressure gauge at the time of the use.
③ Hose connection	3/8" ball valve with 30PM air coupler
④ Silent-Cleaner body	Aluminum alloy casting (AC4B) with melamine resin baking finish
⑤ Hose	Transparent PVC (ID $\phi 32 \times 2000\text{mm}$)
⑥ Draw latch	Iron (Chrome plating) Rivet (Aluminum)
⑦ Suction pipe	PVC (OD $\phi 32 \times 600\text{mm}$)
⑧ Tank	30L Stainless steel (SUS304)
⑨ Stand	Aluminum alloy casting (AC4C) with melamine resin baking finish
⑩ Casters	Conductive casters: 4 pcs (including 1 braked caster)
O-ring	NBR

Performance		
Air pressure	Suction pressure	Air consumption
0.4 Mpa (4 kg/cm ²)	-0.0405 MPa (4,130 mmAq)	470 L/min Normal
0.5 Mpa (5 kg/cm ²)	-0.0536 MPa (5,466 mmAq)	564 L/min Normal
0.6 Mpa (6 kg/cm ²)	-0.0629 MPa (6,414 mmAq)	658 L/min Normal

Remarks
• This model is used specially for adhesive materials like grease. • More than 0.37 MPa (3.7 kg/cm²) air pressure ② is required for operation.

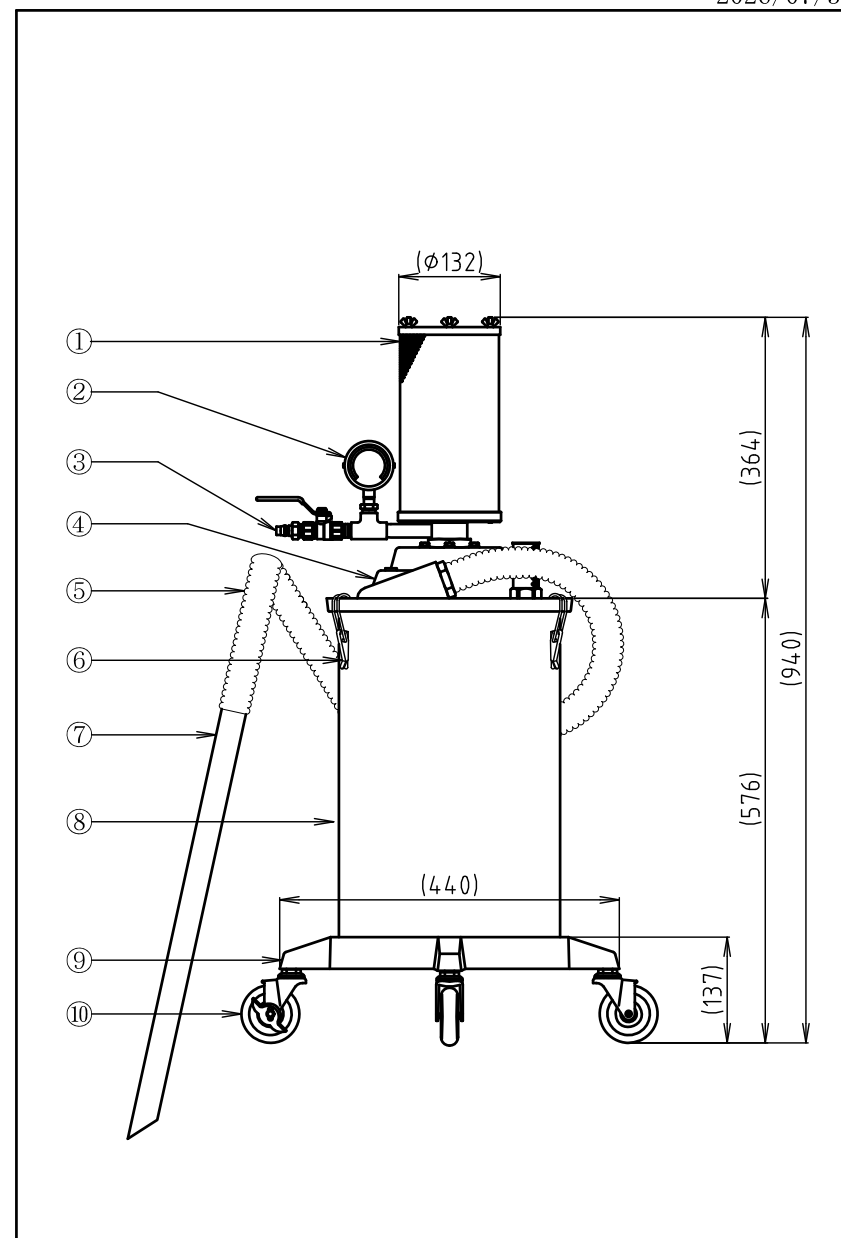

OSAWA & COMPANY

1-7-28 YUNAGI MINATO-KU OSAKA 552-0004 JAPAN
 E-mail: osawa@osawa-company.co.jp
 URL: <https://www.osawa-company.co.jp>