



☆ J-38 · J-50 · J-75

Jumbo Model



Recommended Compressor Power
J-38...7.5~11kw
J-50...15~18.5kw
J-75...More than 26kw

Simple Structure!!
 Mounting Model !!

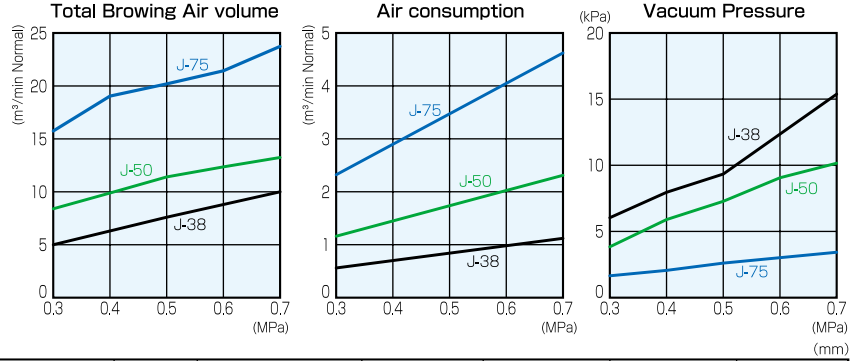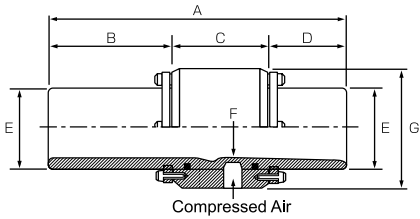


Model	A	B	C	D	E	F(Min ID)	G	Nozzle Orifice	Weight	Ball Valve	Air Connection	Mounting Holes
J-38	190	80	60	50	φ50	φ38	φ 75	φ1.6×12holes	1.8kg	3/8	1/2"	M8×6
J-50	219	90	66	63	φ63	φ50	φ 90	φ2.3×12holes	2.5kg	3/8	1/2"	M8×6
J-75	270	120	76	74	φ90	φ75	φ115	φ2.3×24holes	4.0kg	1/2	3/4"	M8×6

■ Because of small lot of production, Jumbo model becomes out of stock. ■ We offer powerful versions of Jumbo model.
 ■ We offer hoses and dust bag specially for Jumbo model.

☆ W501-S · NW501-S · W501-SG · NW501-SG W501-L · NW501-L · W501-LG · NW501-LG

Mini Model




Compact!! Mounting Model !!

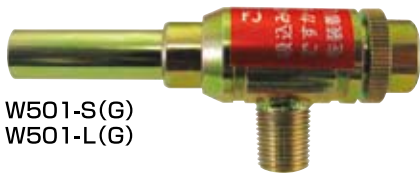

W501-S(G)
 W501-L(G)




NW501-S(G)
 NW501-L(G)

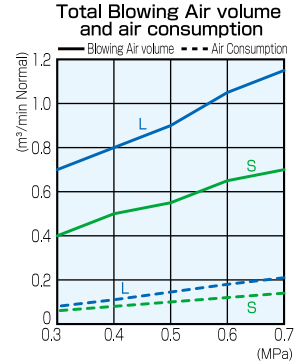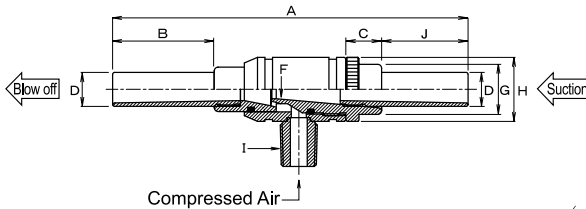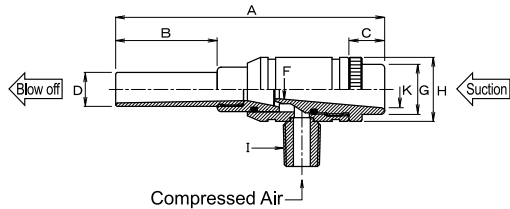


Model	A	B	C	D	F(Min ID)	G	H	I	J	K	Nozzle Orifice	Weight
W501-S(G)	71.5	27	10.5	OD:φ 9 ID:φ 7	φ5	φ13.3	φ17	1/8	—	φ10	φ1.2×3holes(φ1.2×6holes)	58g
W501-L(G)	71.5	27	10.5	OD:φ12 ID:φ10	φ8	φ16.3	φ21	1/8	—	φ13	φ1.3×3holes(φ1.3×6holes)	80g
NW501-S(G)	94.5	27	10.5	OD:φ 9 ID:φ 7	φ5	φ13.3	φ17	1/8	23	—	φ1.2×3holes(φ1.2×6holes)	60g
NW501-L(G)	94.5	27	10.5	OD:φ12 ID:φ10	φ8	φ16.3	φ21	1/8	23	—	φ1.3×3holes(φ1.3×6holes)	83g

■ Powerful versions: Total air blast and thrust increase 70% and suction force increases 50%.

■ B set (for suction)

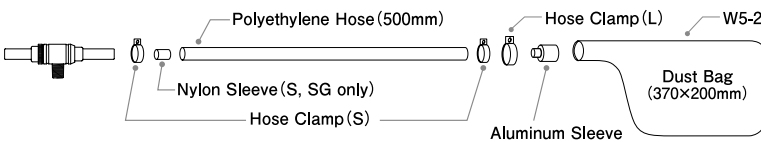

Recommended Compressor Power
W501-S(L)..... 1.1~1.5kw
W501-SG(LG)..... 1.5~3kw
NW501-S(L)..... 1.1~1.5kw
NW501-SG(LG).... 1.5~3kw

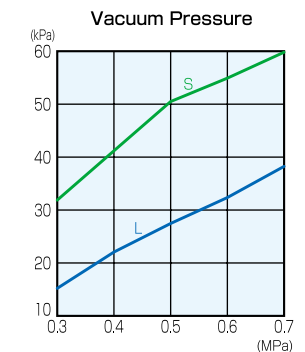

☆ YW501-SG · YW501-LG

YW501 Model



For Suction



For Blow-off

Recommended Compressor Power
1.5~3kw

YW501 series are equipped with hand-grips. Please make sure to specify either suction or blow-off.

■ Please confirm delivery schedule since YW501 type are custom-ordered products.